




## 10W75-8NS 16Ω Available BASS/MID RANGE DRIVER



### KEY FEATURES

- 97dB 1W/1m sensitivity
- 350W AES power handling
- 60Hz-3.5kHz frequency response
- 75.55mm (3.0in) copper clad aluminum voice coil
- Lightweight neodymium inside slug motor system
- Ventilated voice coil gap for reduced power compression
- Heavy-duty cast aluminum chassis for increased rigidity
- Suitable for line arrays and compact two way systems

### MECHANICAL DRAWING

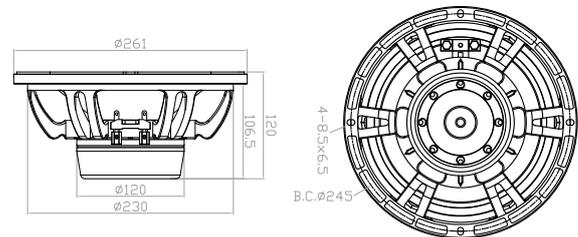


### GENERAL SPECIFICATIONS

Part Number	10W75-8NS
Nominal Diameter	261mm (10in)
Nominal Impedance	8Ω
Minimum Impedance	7.3Ω
AES Power Handling <sup>1</sup>	350W
Maximum Power Handling <sup>2</sup>	700W
Sensitivity (1W/1m) <sup>3</sup>	97dB
Resonance Frequency	60Hz
Frequency Range	60Hz-3.5kHz
Voice Coil Diameter	75.55mm
Winding Material	Copper Clad Aluminum
Former Material	Glass Fiber
Winding Depth	18.5mm
Magnetic Gap Depth	10mm
Xmax <sup>4</sup>	7.6mm
Flux Density	1.1T
Basket Material	Cast Aluminum
Magnet Material	Neodymium Inside Slug
Suspension Material	Fabric
Surround Material	M-Roll Cloth-sealed
Cone Material	Curvilinear Paper
Net Weight	3.7kg


### TS Parameters<sup>5</sup>

Fs	62Hz	Qms	5.5
Re	5.1Ω	Qes	0.31
Le	0.49mH	Qts	0.29
Mms	44g	Vas	25L
Mmd	40g	Ref. Efficiency	1.8%
Cms	0.15mm/N	Sd	346cm <sup>2</sup>
BL	16.9Tm	EBP	200Hz

### FREQUENCY RESPONSE CURVE

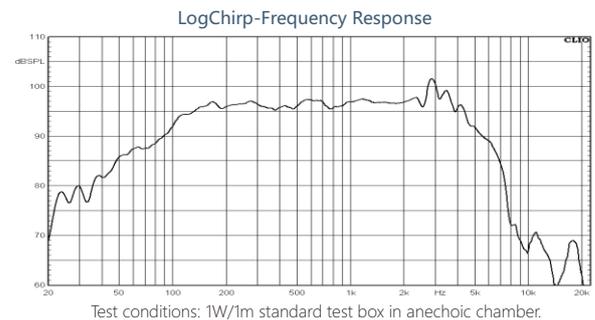

### IMPEDANCE CURVE

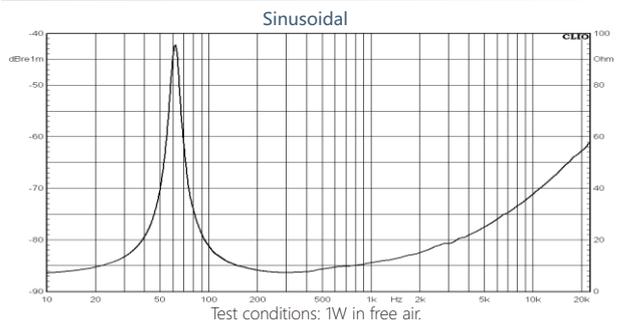

### NOTES

1. Two hours test according to AES 2-1984 Rev. 2003.  
Power calculated on rated minimum impedance.
2. Maximum power is defined as 3dB greater than Nominal power.
3. Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Impedance.
4. Xmax=[(winding depth-magnetic gap depth)/2]+(magnetic gap depth/3).
5. Thiele-Small parameters are measured after a preconditioning test.
6. Power test by continuous pink noise signal within the frequency range.