



18SW100-8TW 4Ω Available BASS/MID RANGE DRIVER



GENERAL SPECIFICATIONS

Part Number	18SW100-8TW
Nominal Diameter	460mm (18in)
Nominal Impedance	8 Ω
Minimum Impedance	6.5 Ω
AES Power Handling ¹	1500W
Maximum Power Handling ²	3000W
Sensitivity (1W/1m) ³	97dB
Resonance Frequency	35Hz
Frequency Range	35Hz-1kHz
Voice Coil Diameter	99.3mm
Winding Material	Copper
Former Material	Glass Fiber
Winding Depth	31mm
Magnetic Gap Depth	15mm
Xmax ⁴	13mm
Flux Density	1.15T
Basket Material	Cast Aluminum
Magnet Material	Ferrite
Suspension Material	Double Fabric
Surround Material	W-Roll Cloth-sealed
Cone Material	Curvilinear Paper
Net Weight	14.9kg


TS Parameters⁵

Fs	34Hz	Qms	10.6
Re	5.6 Ω	Qes	0.41
Le	0.98mH	Qts	0.39
Mms	240g	Vas	187L
Mmd	217g	Ref. Efficiency	1.6%
Cms	0.09mm/N	Sd	1210cm ²
BL	26.3Tm	EBP	83Hz


KEY FEATURES

- 97dB 1W/1m sensitivity
- 1500W AES power handling
- 35Hz-1kHz frequency response
- 99.3mm (4.0in) copper voice coil
- Aluminum demodulating ring for lower distortion
- Double silicon spider for superior excursion control and linearity
- Heavy-duty cast aluminum chassis for increased rigidity
- Suitable for high SPL subwoofer designs


MECHANICAL DRAWING

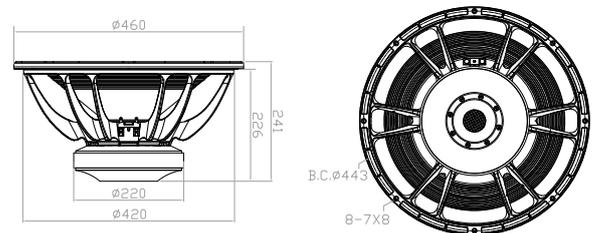

FREQUENCY RESPONSE CURVE

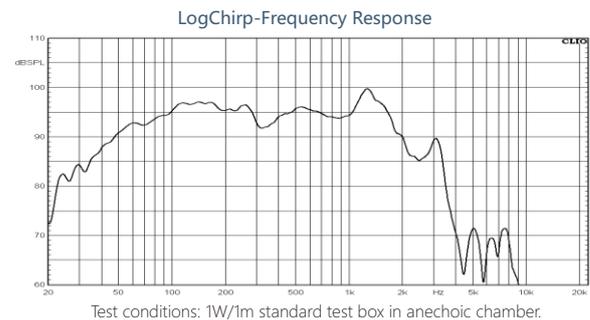

IMPEDANCE CURVE

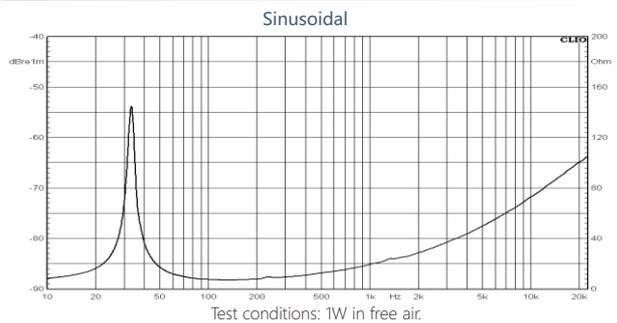

NOTES

1. Two hours test according to AES 2-1984 Rev. 2003.
Power calculated on rated minimum impedance.
2. Maximum power is defined as 3dB greater than Nominal power.
3. Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Impedance.
4. Xmax=[(winding depth-magnetic gap depth)/2]+(magnetic gap depth/3).
5. Thiele-Small parameters are measured after a preconditioning test.
6. Power test by continuous pink noise signal within the frequency range.